



## DEPUTY2

### Customizable Vandal-Resistant City Surveillance System

#### Key Features

- Compatible with most major camera manufacturers or Moog Videolarm's SView™ camera system
- Standard features include: power distributor, surge protection, heater/blower and space for additional components
- Customizable surveillance system based solely around the needs of your specific application
- Expandable, up-to 3 camera systems
- Rugged, outdoor vandal-resistant NEMA enclosure, designed to withstand harsh weather environments
- Integrate several optional accessories (wireless, flashing lights, camera housings) to better enhance/optimize your surveillance system
- Dimensions: (W\*H\*D) 16" x 18" x 14" (dimensions will vary with additional side housings)



## Customizable City Surveillance System:

The following is a list of standard features and options that can be integrated into the Deputy2 system to achieve maximum performance for any given application.

- Thermostatically controlled system (operating temperatures to -20°C to 50°C)
- Stainless steel straps for quick deployment to exterior pole
- Pressurized system withstands the induction of minute particles (Pressure Dome)
- Power supply: input 115/220Vac (220 model available)
- Blower/thermostat

## Deputy2 Box With Wall Mount:

### D2BW1

Support for up to 3 cameras. Stainless steel/aluminum construction, 110Vac input surge protection, heater/blower system and 24Vac output to the camera. Space for user installed electronics

## FEATURES:

- Meets IP66 and NEMA4X standards for water and dust protection
- Space to add additional electronics: wireless, additional surge protection, video storage, analytic equipment
- 110Vac input with power distribution for (3) camera systems, and other electronic equipment
- Electronic cabinet for surveillance systems, support for up to 3 cameras (PTZ and/or fixed)
- Heater/blower system to protect sensitive electronic equipment
- Stainless steel/aluminum construction for harsh environments
- 4 position 110Vac outlet for installer added components
- Compact size with durable white powder coat finish
- Power surge protection for all electronics
- Pad lockable cabinet door
- Mount tabs for antennas
- Vandal-resistant

## OPTIONAL ACCESSORIES:

### IP Network Ready 7" Vandal-Resistant Outdoor Recessed Dome Housing: RM7C2N

Recessed ceiling mount, clear dome, with 24Vac input, heater/blower, for an IP network PTZ camera

### IP Network Ready Outdoor Environmental Housing with WM1500 Wireless Wall Mount: ACH13HBN15

24Vac input, 12 or 24 output for camera, thermostatically controlled heater/blower, for an IP network camera

### IP Network Ready 7" Vandal-Resistant Outdoor Dome Housing with Wall Mount: RHW75C2N

Rugged cast aluminum top and polycarbonate clear dome, with 24Vac input, heater/blower, for an IP network PTZ camera

### 2.4GHz Wireless Access Point for the Deputy2: D2VLRL24

Omni directional antenna (For IP cameras only)

### Deputy2 Flashing Light Kit: D2LK1B


1 long lasting blue LED flashing light with mounting bar for Deputy2 Box

### D2LK2B

2 long lasting blue LED flashing light with mounting bar for Deputy2 Box

## UPGRADABLE VISUAL APPEARANCE:

An optional added benefit to Moog Videolarm's Deputy2 is the ability to include a graphical logo / artwork to either the Deputy2 enclosure or/and the camera housing. The end result is a technically advanced security system that captures the visual appearance of the monitoring establishment.

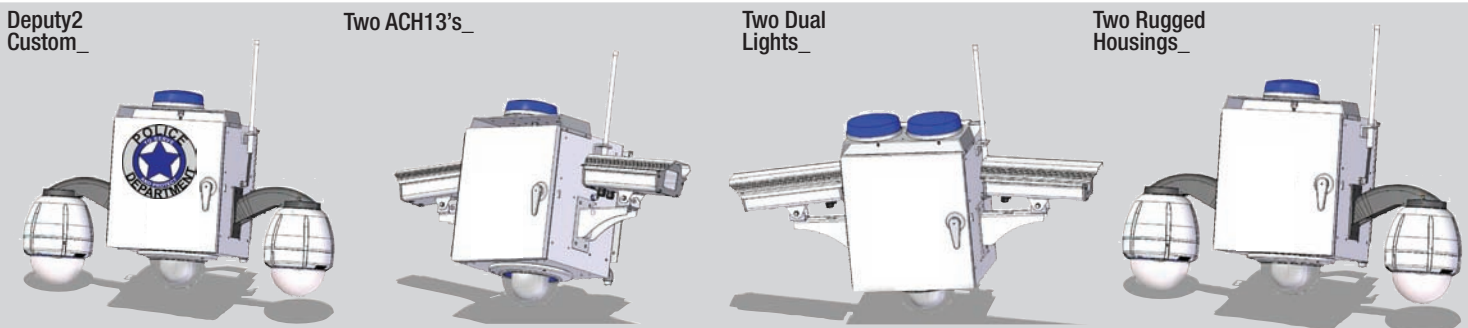

Above: Illustrations represent examples of the customizable properties of the Deputy2, additional configurations available